



SINGLEstream™ 1406

10G/1G Fiber Aggregation Tap with Media Conversion

Flexible, Line-Rate 10G/1G Fiber Tap for Cost Effective Data Capture and Monitoring Applications

Passive Tapping

These network taps are ideal for security applications, network monitoring and anywhere you need to see all the data that only an In-Line solution can provide. Invisible to the network, completely passive and fault-tolerant, fiber taps will not affect network performance or integrity.

A copy of traffic from the network links are passively copied for monitoring. In the rare event of power loss, traffic is completely unaffected on connected network devices.

Aggregation (Many-to-Any)

Many-to-Any monitoring access aggregates network traffic and provides visibility for one or more monitoring tools. Aggregate and reassemble full duplex conversations from one or more trunked links.

Perfect for tools that don't support multiple monitoring interfaces or for redundant networks, EtherChannel, load balanced servers, and asymmetrically routed traffic.

Regeneration (Any-to-Many)

Any-to-Many configurations replicate copies of identical network traffic to provide multiple tools with monitoring access to the same links.

In addition to eliminating contention for scarce SPAN ports and test access points, multiple tools can be connected to the same link for redundancy, testing, or advanced monitoring applications.

Port Steering (Any-Any)

The monitoring ports can be configured as input (network) or output (monitoring) ports on the fly through an easy to use command line interface (CLI). The designation of these ports may be changed as needs change.

Robust Management, Security, and Logging

Manage your switch using built-in, easy to use CLI. Supports Remote Management, E-mail notifications, as well as event logging to monitor changes to the Tap and the connected devices.

Highlights


- Consolidate monitoring tools to reduce management expenses and lower tool costs
- Single point of deployment and remote management minimizes management expenses and reduces MTTR
- Monitor 10G links with 1G tools for increased ROI and more efficient use of monitoring resources
- Easily share scarce SPAN ports and test access points without maintenance windows
- Can receive traffic from external taps or SPAN ports to allow you to deploy tools right away without impacting your production network, which simplifies the change control process

Features

- Passive Tap eliminates the risk of network traffic loss during power loss.
- 160 Gbps backplane
- All ports active with full features- no per port licensing.
- Aggregation/Regeneration - Combine network sources or channels into one stream or send copies to multiple connected tools to share data sources
- Flexible deployment options - copper, single mode, multi-mode, and media conversion
- Dual redundant power supplies ensure monitoring uptime
- Manage device remotely or locally with an extensive CLI
- Management port for remote connectivity
- E-mail event notifications on user-defined events
- NTP Support

SINGLEstream™ 1406

10G/1G Fiber Aggregation Tap with Media Conversion

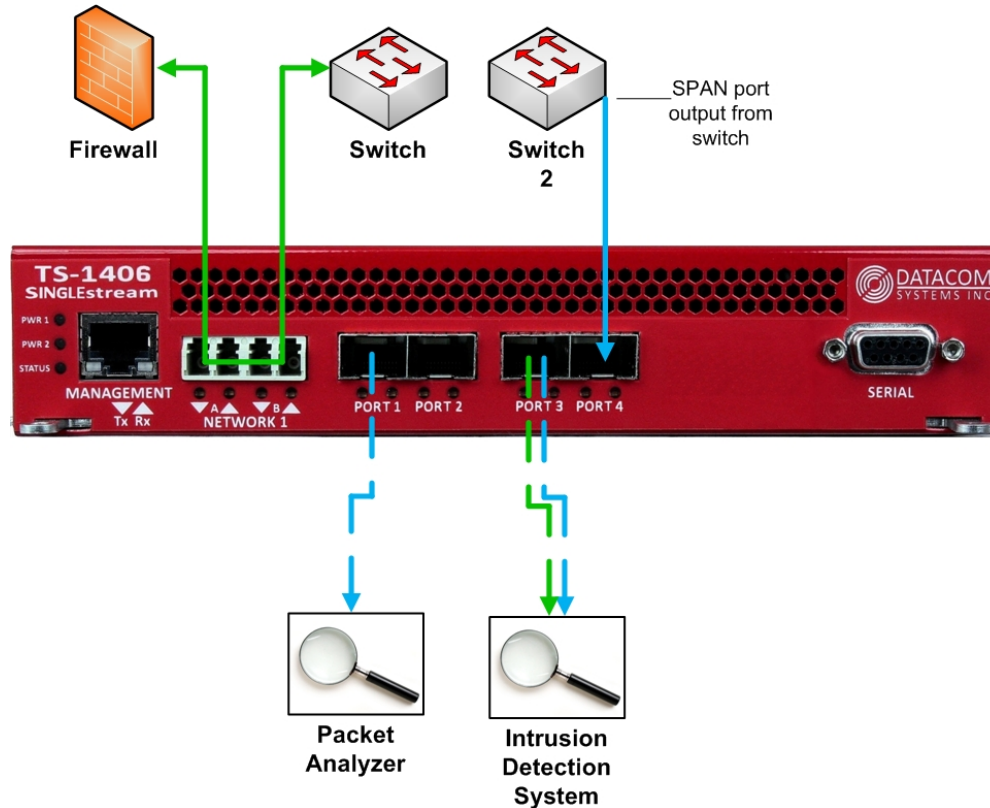

Technical Specifications

PORTS

Any-to-Any Ports: Four (4) SFP+
(Supports SFP+ SR, LR, LRM, SFP SX, LX, BT)
Tap Ports: Two (2) 10/1G Fiber
Management Port: RJ45
Console Port: DB9

POWER REQUIREMENTS

Dual Redundant Hot Swappable Power Supplies (Included)
Maximum Power Consumption: Less than 90 Watts
Individual Power Supply Rating: 100-240V ~50-60Hz 7A MAX.

CERTIFICATIONS

CE, RoHS

DIMENSIONS (HXWXD)

1.5 x 8.3 x 12.5 in (3.81 x 21.08 x 31.75 cm)

WEIGHT

3.75 lbs (1.7 kgs)

ENVIRONMENTAL

Operating Temperature: 32° to 104°F (0° to 40°C)
Storage Temperature: -22° to 149°F (-30° to 65°C)
Humidity: 5 to 90% non-condensing

WARRANTY

One (1) Year Hardware Warranty included. Advanced Replacement-
Next Day, third business day options available.

INSERTION LOSS

- Multimode (50/62.5 micron diameter) 50/50 = 4.2 dB
- Multimode (50/62.5 micron diameter) 70/30 = 3.0 / 6.7 dB
- Singlemode (9 micron diameter) 50/50 = 3.9 dB Singlemode
- (9 micron diameter) 70/30 = 2.2 / 6.3 dB

*approximate per fiber

ORDER INFORMATION

Product

TS-1406

Optional Equipment

SFP+-SR/SX
SFP+-LR/LX
SFP-SX
SFP-LX
SFP-RJ45

RMC-2C

Description

SINGLEstream™ 6 Port 10G Aggregation
Network Tap. Supports 1 tapped link, 4
any-to-any ports.

10G/1G Multimode Fiber Transceiver
10G/1G Singlemode Fiber Transceiver
1G Multimode Fiber Transceiver
1G Singlemode Fiber Transceiver 1G
Copper Transceiver

Rack mount for TS-1406. Fits two
units in a 1U chassis.